



Section 3:



Step 13: Line the fold template up on Line 2.

Step 14: Fold the paper back over the top of the fold template and trim a quarter-inch seam with the Add-A-Quarter ruler. Repeat this on each of the (8) units.

Step 15: Position the LS strip for Sec. 3 at your machine. Line the trimmed edge of fabric #2 up with the edge of strip #3.



Step 16: Open the paper and sew on line 2. Continue sewing each of the foundation units onto the strip.

All (8) units are sewn onto the strip. Keep the papers lined up as straight as possible along the edge of the fabrics. Don't forget to leave a 3/8" space between each strip.

Step 17: When you are done sewing, carry the units over to the ironing board. Repeat the previous Steps 10-16 to complete the piecing for Sec. 4.


Piecing LS Rows-2, R-3, and R-4.

Row two begins with (2) strips of fabric. Strip #1 and strip #2 are positioned, facing *right-sides-together* with strip #1 on the top.

Strip #2 is positioned underneath strip #1 *right-side-up*.



Position the papers onto the strips as shown. Keep the papers lined up as straight as possible along the edge of the fabrics and sew on Line 1.

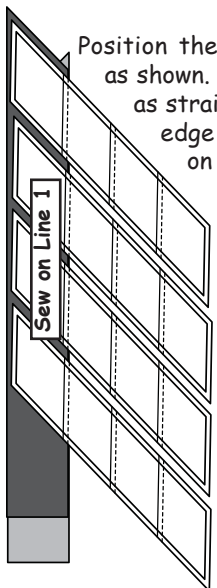

When you are done sewing press the strips open.

Complete the strip piecing for each row by repeating the previous steps. Then trim off the excess fabric and foundation paper from the exterior boundaries the each unit.




Assemble the Stars

Assemble the rows to complete (8) star points


Arrange the rows in the order they will be sewn together to complete the star.




Step 1: Position LS Row-2 onto the top of LS Row-1 Position both strips *right-sides-together* with LS Row-1 on the bottom. Match and pin both pieces together at the intersection of each *cross-section* on the 1/4" seam allowance.



Once the pieces are pinned together, remove the foundation papers from beneath Row-1 on the bottom without disturbing the pins. Sew both strips together with Row-1 next to the feed dogs. Press the seam towards Row-1.

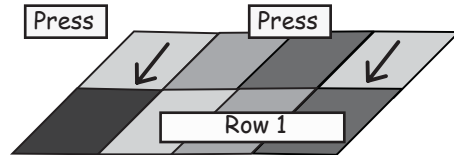


Step 2: Position LS Row-3 onto the top of LS Row-2. Position both strips *right-sides-together* with Row-2 on the bottom and Row-3 on the top. Match and pin both pieces together at each cross-section on the 1/4" seam allowance.

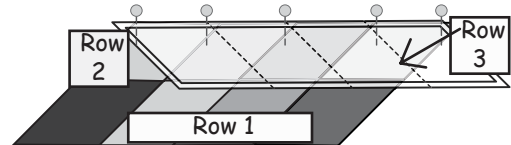

Remove the foundation papers from Row-2 without disturbing the pins. Sew both strips together with Row-2 next to the feed dogs. Press the seam towards Row-2.

Step 3: Position LS Row-4 onto the top of Row-3. Position both strips *right-sides-together* with Row-3 on the bottom and Row-4 on the top. Match and pin both pieces together at each cross-section.

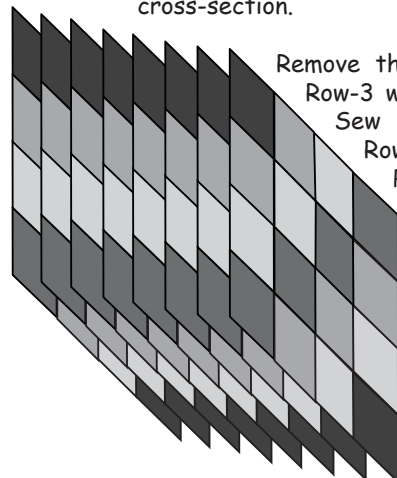

Remove the foundation papers from Row-3 without disturbing the pins. Sew both strips together with Row-3 next to the feed dogs. Press the seam towards Row-3 unit.

Complete each of the (8) star points

Do not remove the paper from Row 4.